ITALIAN TECHNOLOGY

NUOVO MINIVAP40

NEW MINIVAP40

PRONTA CONSEGNA
NOW IN PROMPT DELIVERY

MASSIMO RENDIMENTO, INSTALLAZIONE IMMEDIATA

MAXIMUM EFFICIENCY, INSTANT INSTALLATION

DESCRIZIONE - *DESCRIPTION*

Il nuovo Minivap40 è un'evoluzione della precedente versione, con prestazioni migliori ed installazione ancora più rapida. La nuova evoluta versione di Minivap40 è in grado di riscaldare il GPL con maggiore efficienza: ciò garantisce assenza totale di GPL liquido in uscita e funzionamento sicuro per le utenze servite.
La nuova configurazione è progettata per essere molto veloce e semplice da installare a parete, con il minimo ingombro.
Minivap40 inizia immediatamente a fornire gas, dopo appena qualche minuto si può raggiungere la massima portata.

New version of Minivap40 offers the user a better product, with increased efficiency and even easier installation. This revolutionized version of vaporizer reaches higher gas temperature at the outlet: this means no liquid at all and perfect and safe working of user equipment.
The new layout is designed to be very smart and easy to install against a wall, with minimum need for space. Minivap40 starts immediately to give you gas, in very few minutes you can have the maximum capacity.

TÜVRheinland CERTIFIED
Management System ISO 9001:2008
www.tuv.com ID 9105073540
"Quality Management System and CE PED Product Surveillance"

PEGORARO
GAS INNOVATIVE TECHNOLOGIES

CARATTERISTICHE PRINCIPALI / *MAIN FEATURES*				
Tipologia di Vaporizzatore *Type of Vaporizer*	Vaporizzatore ad Acqua *Water Bath Vaporizer*			
Modello / *Model*	Preriscaldo Elettrico *Electric Preheat*			Boiler Esterno *External Boiler*
Portata / Flow Rate	30 kg/h	40 kg/h		40 kg/h
Potenza Elettrica *Electric Power*	4 kW 220V	5 kW 380V	5 kW 220V	---
Attacchi Lato Gas / *Gas Connections [in]*	In: 1/2" Out: 1/2"			
Attacchi Lato Acqua / Water Connections [in]	In: 1/2" Out: 1/2"			In: 1/2" Out: 3/4"
Dimensioni / *Dimensions*	vedi figura / *See Figure*			
Dimensioni imballaggio *Shipping Dimension*	Minivap Box: 75x40xh40 cm - 25 Kg			

DOTAZIONE / EQUIPMENT	
dotazione standard / *current equipment*	*Valvola termostatica per il controllo del vaporizzatore* *Thermostatic Regulation Valve for the vaporizer control*
	Valvola Sicurezza GPL *Safety Valve on LPG outlet*
	Valvola Sicurezza Acqua *Water Safety Valve*
	Termometro Acqua *Water Thermometer*
	Vaso espansione integrato *Built-in Expansion Tank*
	Staffa a parete per rapida installazione *Wall Hanger for easy installation*
optional / *optional*	*Scatola elettrica di controllo* *Electric Control Box*
	Livellostato Acqua *Water Switch Level*

VISTA DI INSIEME
GENERAL ASSEMBLY

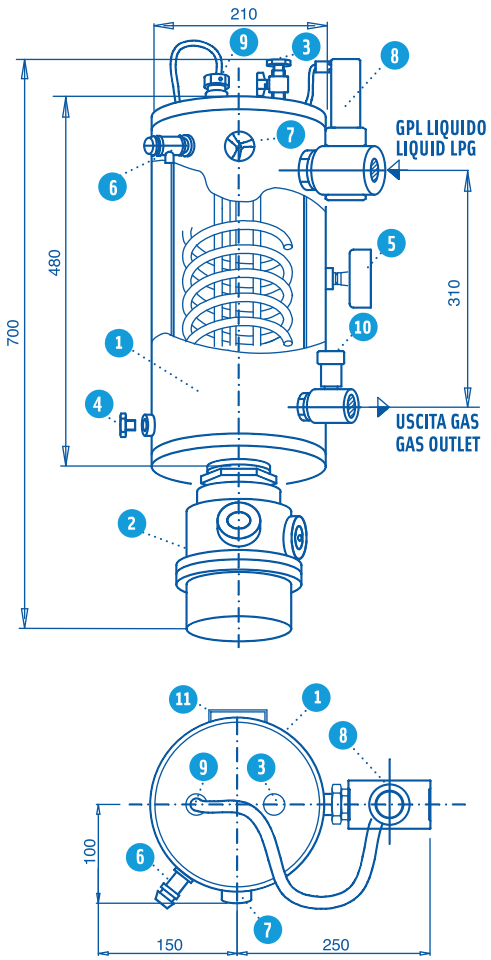

VERSIONE ELETTRICA
(30KG/H E 40KG/H)
ELECTRIC VERSION
(30KG/H AND 40KG/H)

1 Scambiatore di calore "mini"
"Mini" heat exchanger
2 Resistenza elettrica
Eexd heating element
3 Valvola per riempimento acqua
Valve for water filling
4 Tappo per scarico acqua
Plug for water discharging
5 Termometro acqua
Water thermometer
6 Valvola sicurezza acqua
Safety valve for water - 3 Bar
7 Spia indicatore livello visivo
Water level visual indicator
8 Valvola termostatica
Thermostatic valve
9 Sonda temperatura acqua
Water temperature probe
10 Valvola sicurezza gas
Safety valve for gas 18 Bar
11 Agganci per supporto
Hanging for wall

OPTIONAL: SCATOLA CONTROLLO GIÀ CABLATA
OPTIONAL: CONTROL BOX ALREADY WIRED UP

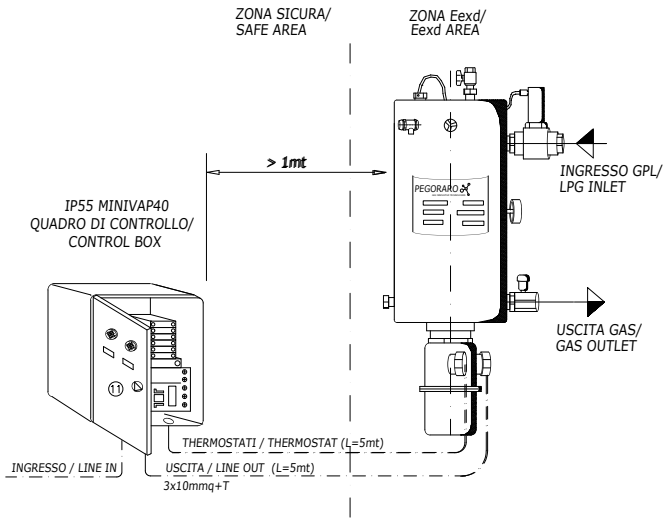

Realizzato in accordo alle normative VSR-M-S ISPESL Ed.1999 adeguate alla Direttiva 97/23/CE PED ed integrate da EN 13445-5; ASME VIII div.1 Ed.2002.
Altre direttive applicate: direttiva 94/9/CE ATEX

Realized as per norms VSR-M-S ISPESL ed.1999 conformed to Directive 97/23/EC PED and integrated by EN13445-5; ASME VIII Div.1 ed.2002. Other Directive applied: Directive 94/9/EC ATEX

Stampa CORAPRINT - Ed. 09_2014

PEGORARO
GAS INNOVATIVE TECHNOLOGIES

PEGORARO GAS TECHNOLOGIES srl
registered office: via e. fermi, 253 - 36100 vicenza (italy)
main office: viale della tecnica, 28 - 36100 vicenza (italy)
t. +39.0444.289382 - f. +39.0444.963056
info@pegoraro.it - www.pegoraro.it